



CUSTOM SKYLIGHTS

Custom-designed Skylights
Electric Skylights
Lifting Skylights
Automatic Sunrooms



ALTITUDE RANGE BY NATURAL LIGHTING PRODUCTS PTY LTD.

1300-SKYLIGHT
naturallighting.com.au



SELECTION OF INNOVATIVE AND
ENERGY-EFFICIENT WINDOWS

SKYLIGHT

CONTENTS

03

RETRACTABLE SKYLIGHT
SYSTEMS

03 / 04

07

SLIDING SKYLIGHT
SYSTEMS

07 / 08

09

ELECTRIC RISING SKYLIGHT
SYSTEMS

09 / 10

11

ELECTRICAL FLUSH
SKYLIGHT

11 / 12

13

NARROW SLIM SKYLIGHT
SYSTEMS

13 / 14

15

TOP-HUNG SKYLIGHT
SYSTEMS

15 / 16

17

ALUMINUM ALLOY SKYLIGHT
SYSTEMS


17 / 18

RETRACTABLE SKYLIGHT SYSTEMS


On request, systems can extend beyond these variations depending on the project-specific applications. Custom designs are available to suit the project requirements, building codes, and wind considerations limited to static calculations.



Close state

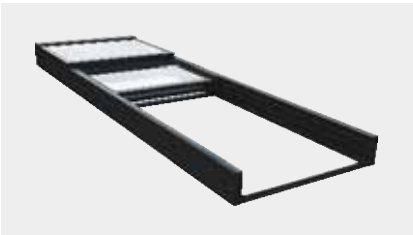


Two panels open state

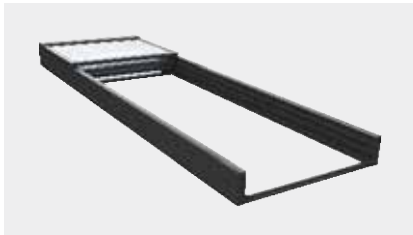


Open state

Triple overlap




Single fan

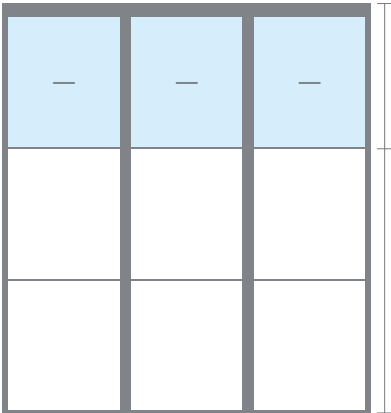


Multiple combination

33% Closed
66% Open

Quadruple overlap




Single fan

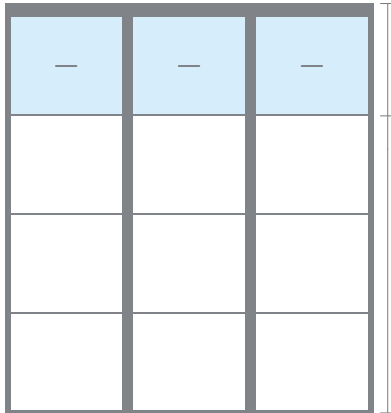


Multiple combination

25% Closed
75% Open

RETRACTION UP

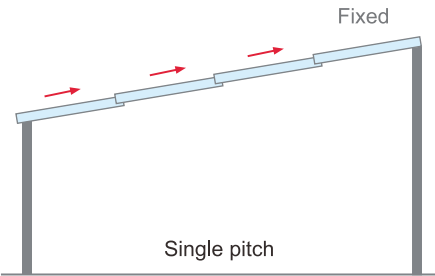


Single pitch

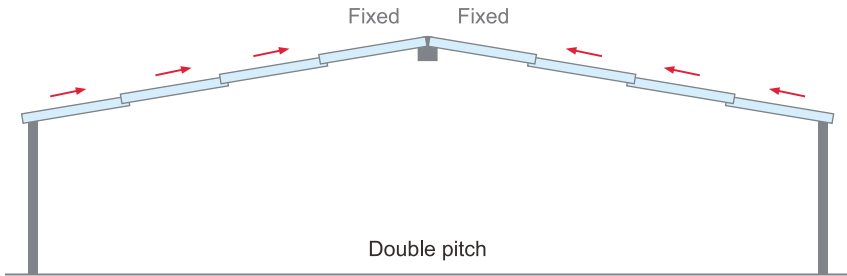

Double pitch

Roof hatch combinations

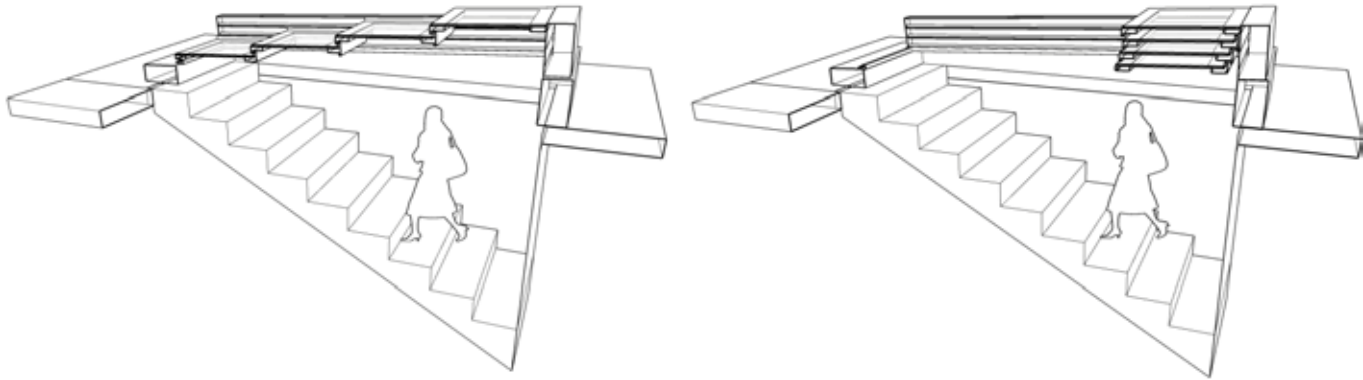

STANDARD AND OPTIONAL CLASSIFICATIONS

OPENING METHOD	Electric translation	
SURFACE TREATMENT	Electrostatic powderspraying	
PROFILE SPECIFICATIONS	The average thickness of the profiles is 3.0mm	
PROFILE SPECIFICATIONS	Total area ≤12m²	
	Overall width ≤6000mm	
	Overall height 700~2200mm	
SMART CONFIGURATION	☒ Watt silent motor	☐ Mobile phone remote control
	☒ Wireless remote control	☐ Voice control
	☐ Hollow Honeycomb Blinds	☐ Smart home system
GLASS CONFIGURATION	☐ 5mm+0.76pvb+5mm	
	☐ 6mm+0.76pvb+6mm	

☒ Means standard ☐ Means optional




EVERYONE HAS A
WINDOW SEAT




SLIDING SKYLIGHT SYSTEMS




Closed state

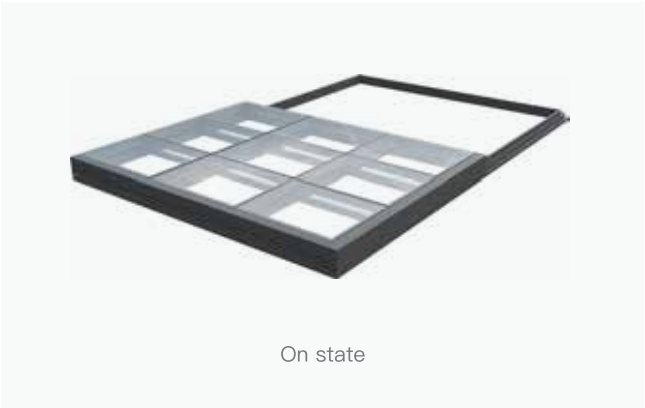


On state




Split translation



Single opening translation



Extend the track



No track translation

OPENING METHOD	Electric translation	
SURFACE TREATMENT	Electrostatic powderspraying	
CUSTOMIZATION RANGE	Maximum area of a single fan ≤36㎡	
	Single fan width 600~6000mm	
	Single fan length 600~6000mm	
SMART CONFIGURATION	☒ Watt silent motor	☐ Hollow Honeycomb Blinds
	☒ Wireless remote control	☐ Mobile phone remote control
	☐ Wireless solar rain sensor	☐ Voice control
	☐ Uninterruptible backup power	☐ Smart home system
GLASS CONFIGURATION	☐ 5mm+27Ar+5mm	
	☐ 8mm+1.52pvb+8mm	
	☐ 5mm+22Ar+5mm+0.76pvb+5mm	


☒ Means standard ☐ Means optional




ELECTRIC RISING SKYLIGHT SYSTEMS




Closed state

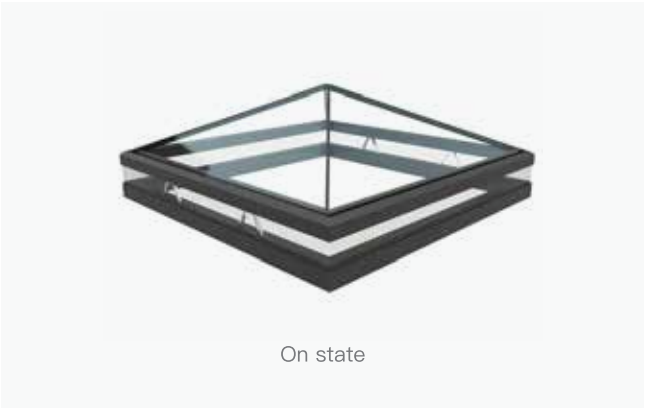


On state



Gold shaped glass roof

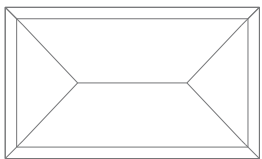

Diamond glass top



Flat top

OPENING METHOD	Electric rise	
SURFACE TREATMENT	Electrostatic powderspraying	
PROFILE SPECIFICATIONS	The average thickness of the profiles is 3.0mm	
CUSTOMIZATION RANGE	Maximum area of a single fan ≤15m²	
	Single fan width、length ≤6000mm	
SMART CONFIGURATION	☒ Watt silent motor	☒ Mobile phone remote control
	☒ Wireless remote control	☒ Smart home system
	☒ LED ambient light	☐ Wireless solar rain sensor
	☒ Diamond screen window	☐ Hollow Honeycomb Blinds
	☐ 5mm+27Ar+5mm	
GLASS CONFIGURATION	☐ 5mm+0.76pvb+5mm	
	☐ 5mm+22Ar+5mm+0.76pvb+5mm	

☒ Means standard ☐ Means optional




TOP-HUNG SKYLIGHT SYSTEMS



Closed state



On state

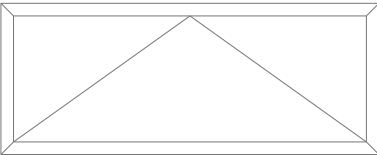

Therma / Non-thermal structure

OPENING METHOD	Electric rise	
SURFACE TREATMENT	Electric upper suspension and outward opening	
PROFILE SPECIFICATIONS	The average thickness of the profiles is 3.5mm	
CUSTOMIZATION RANGE	Single fan width ≤4000mm	
	Single fan length 650~4000mm	
SMART CONFIGURATION	● Watt silent motor	● Mobile phone remote control
	● Wireless remote control	● Smart home system
	● LED ambient light	○ Wireless solar rain sensor
	● Diamond screen window	○ Hollow Honeycomb Blinds
	○ 5mm+27Ar+5mm	
GLASS CONFIGURATION	○ 5mm+0.76pvb+5mm	
	○ 5mm+22Ar+5mm+0.76pvb+5mm	

● Means standard ○ Means optional




FOR ROOF PATIO,
OFFICE, AND HOME




ELECTRICAL FLUSH SKYLIGHT




Closed state

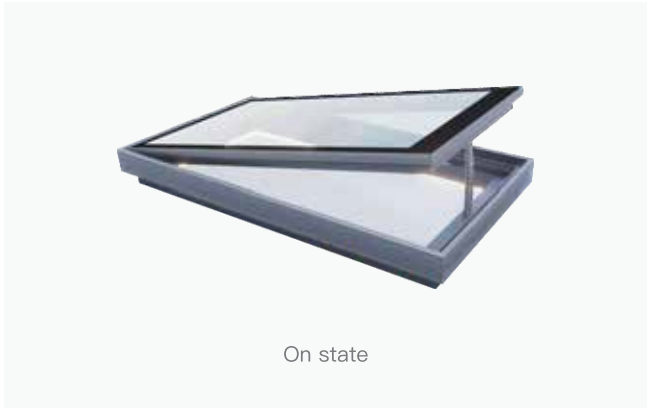

On state

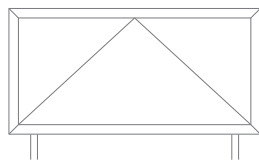

Upper suspension and outward opening



Electric rise

OPENING METHOD	Electric upper suspension and outward opening / Electric rise	
SURFACE TREATMENT	Electrostatic powder spraying	
PROFILE SPECIFICATIONS	The average thickness of the profiles is 2.0mm	
CUSTOMIZATION RANGE	Maximum area of a single fan ≤3m²	
	Single fan width ≤3000mm	
	Single fan length ≤2000mm	
SMART CONFIGURATION	☒ Watt silent motor	☒ Mobile phone remote control
	☒ Wireless remote control	☒ Smart home system
	☒ LED ambient light	☐ Uninterruptible backup power
	☐ Hollow Honeycomb Blinds	☐ Fixed screen
	☐ Wireless solar rain sensor	☐ Voice control
GLASS CONFIGURATION	☐ 8mm+1.14pvb+8mm	

☒ Means standard ☐ Means optional




MAKE LIFE MORE
COMFORTABLE AND SUNNY


NARROW SLIM SKYLIGHT SYSTEMS




Single open view

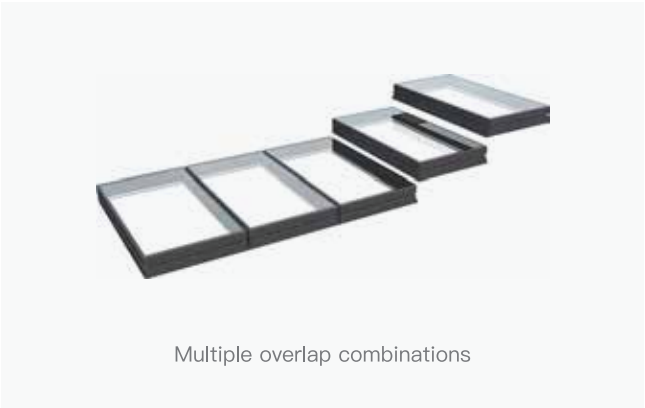

Multiple overlap combinations



Single

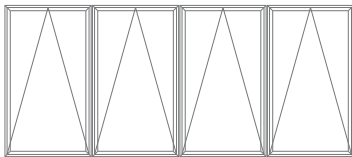


Multiple random lap combinations

Therma / Non-thermal structure

OPENING METHOD	Electric upper suspension and outward opening	
SURFACE TREATMENT	Electrostatic powderspraying	
PROFILE SPECIFICATIONS	The average thickness of the profiles is 2.5mm	
CUSTOMIZATION RANGE	Single fan width 700~4000mm	
	Single fan length 400~2000mm	
SMART CONFIGURATION	☒ Watt silent motor	☒ Mobile phone remote control
	☒ Wireless remote control	☒ Smart home system
	☒ LED ambient light	☐ Uninterruptible backup power
	☐ Hollow Honeycomb Blinds	☐ Fixed screen
	☐ Wireless solar rain sensor	☐ Voice control
	☐ 5mm+27Ar+5mm	
GLASS CONFIGURATION	☐ 5mm+0.76pvb+5mm	
	☐ 5mm+22Ar+5mm+0.76pvb+5mm	

☒ Means standard ☐ Means optional

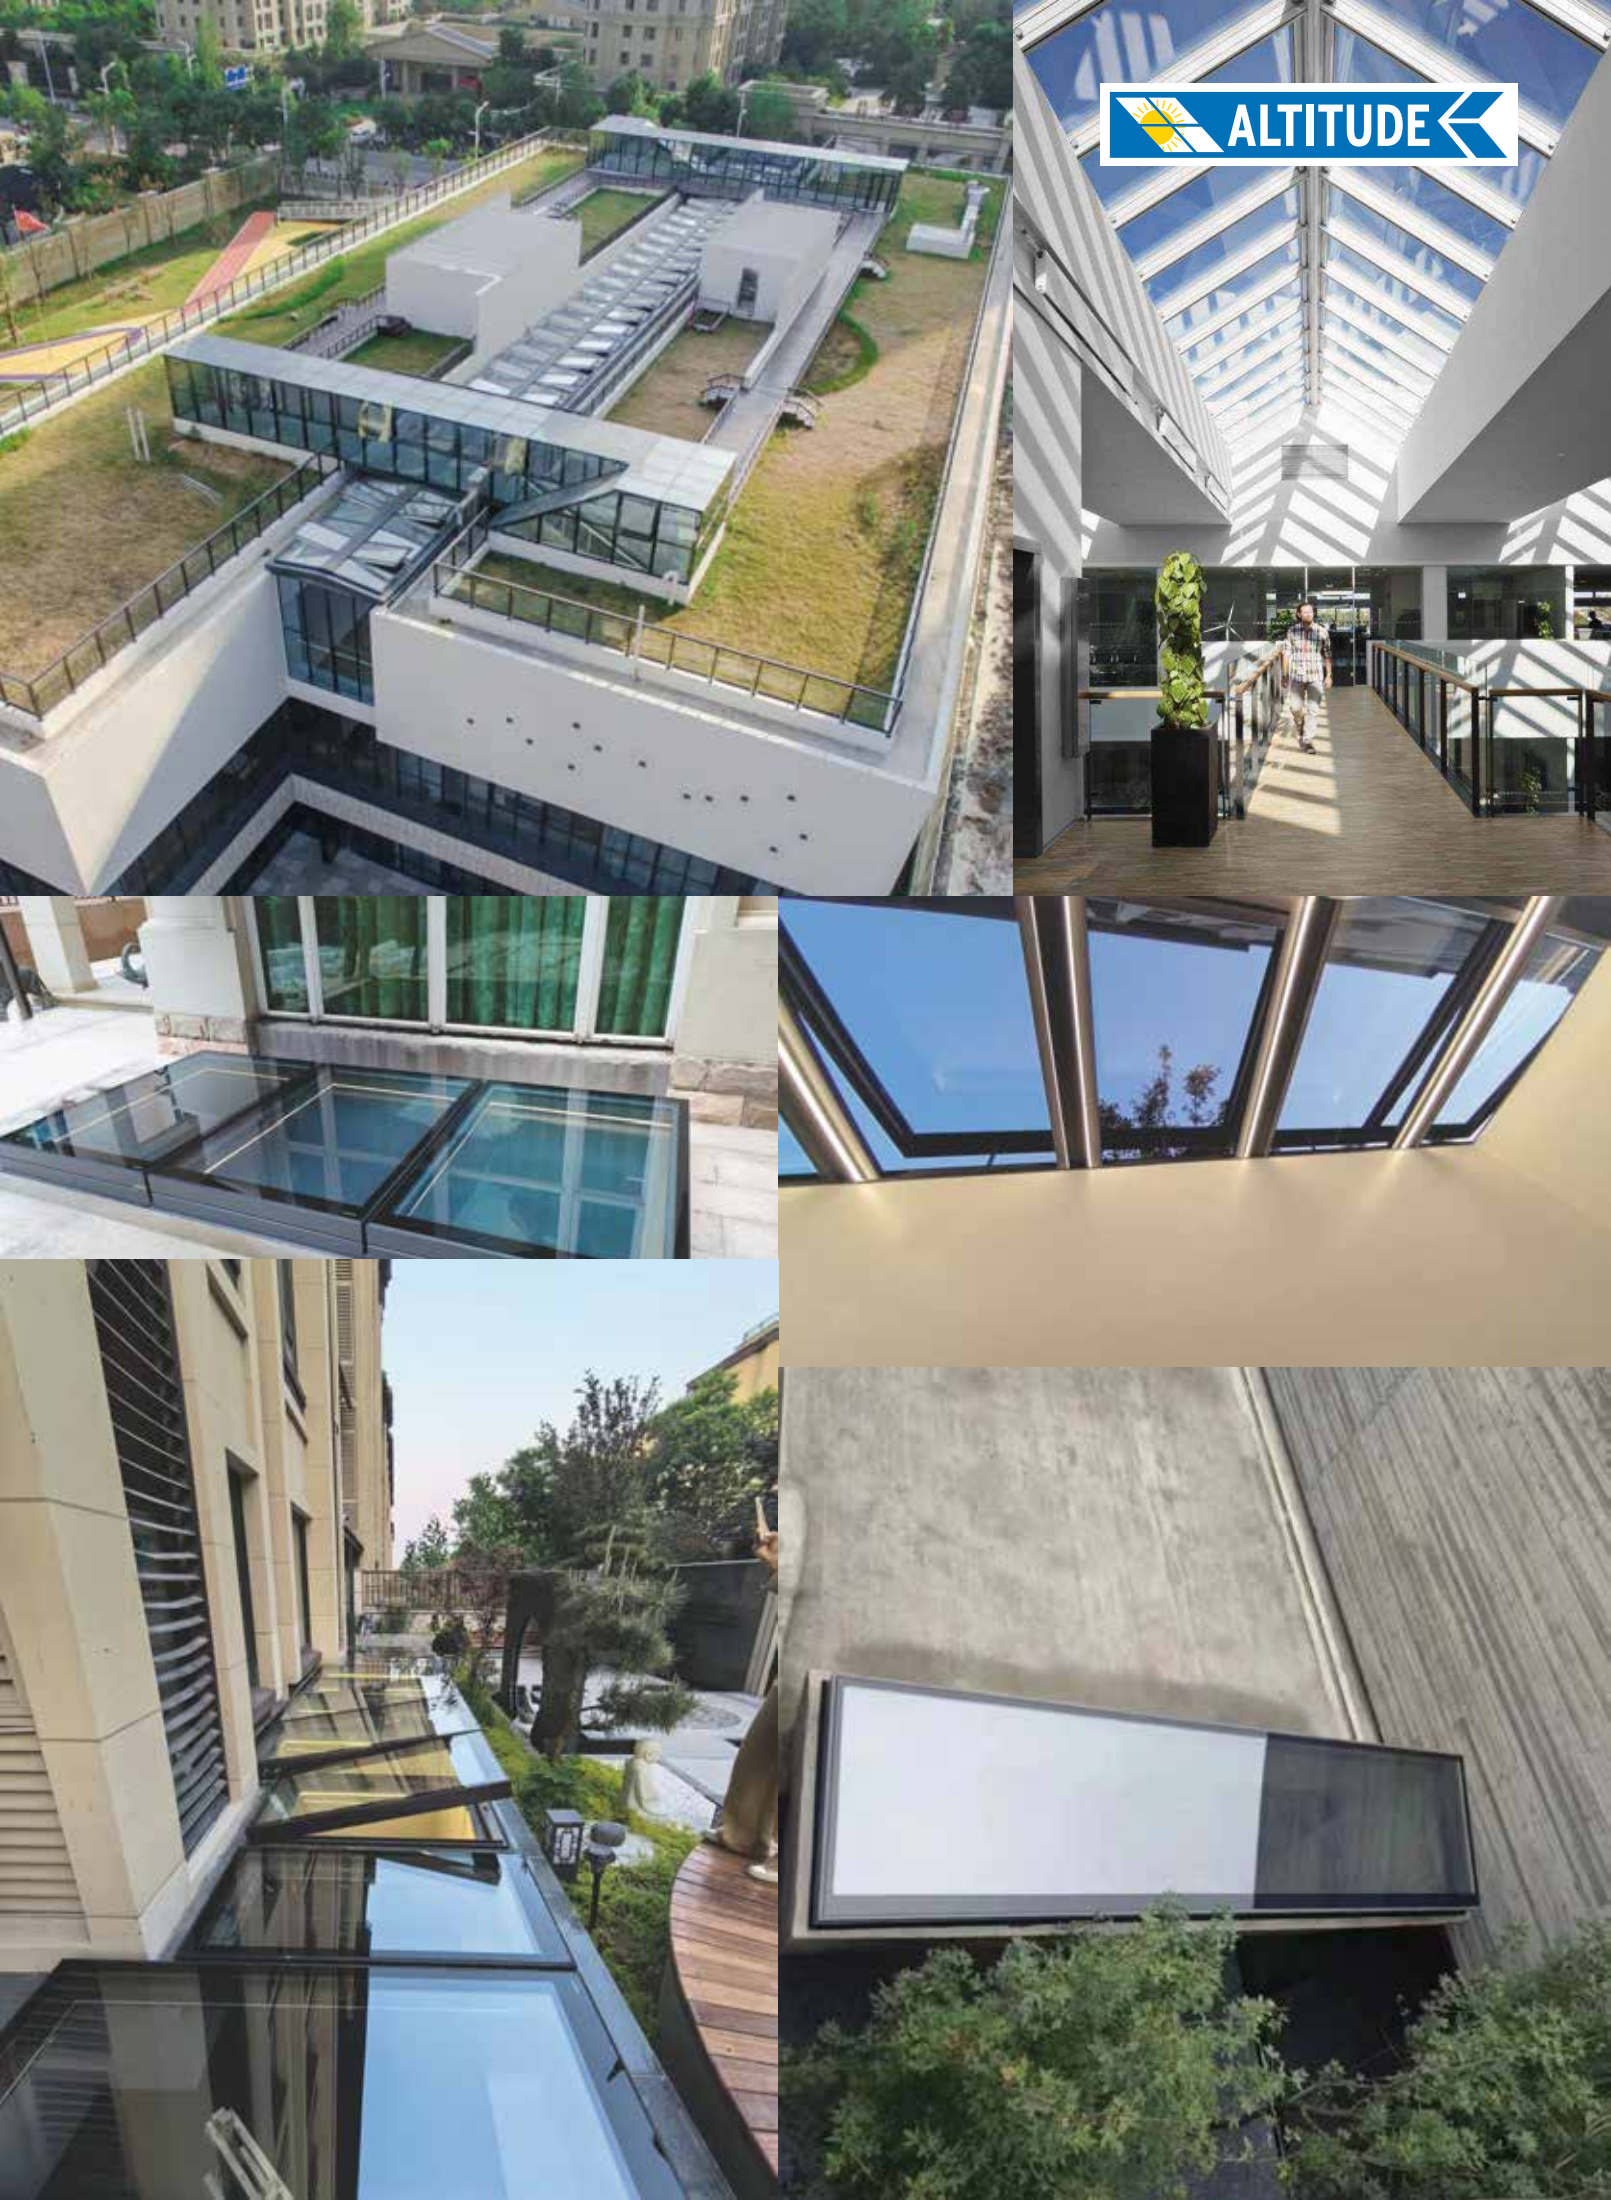


TRADATIONAL CHAIN SKYLIGHT SYSTEMS




Closed state



On state



Single

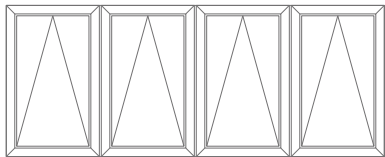

Multiple random lap combinations

OPENING METHOD	Electric upper suspension and outward opening	
SURFACE TREATMENT	Electrostatic powderspraying	
PROFILE SPECIFICATIONS	The average thickness of the profiles is 2.0mm	
CUSTOMIZATION RANGE	Single fan width ≥700mm	
	Single fan length ≤3000mm	
SMART CONFIGURATION	☒ Watt silent motor	☐ Mobile phone remote control
	☒ Wireless remote control	☐ Smart home system
	☐ Wireless solar rain sensor	☐ Uninterruptible backup power
	☐ Hollow Honeycomb Blinds	☐ Fixed screen
	☐ Voice control	
GLASS CONFIGURATION	☐ 5mm+27Ar+5mm	
	☐ 5mm+0.76pvb+5mm	
	☐ 5mm+22Ar+5mm+0.76pvb+5mm	

☒ Means standard ☐ Means optional

